

NEW! | QUAD SERIES

Punch Quad Variable

AAdynTech's Punch Quad is the most powerful LED soft light in its class, consuming only 2,600 watts of power and outputting an amazing 285,000 lumens. The fixture, control box and connecting cable are rated IP65; weatherproof under any condition.

With a CRI of over 92, the Punch Quad creates a beautiful, even field of light in Daylight, Tungsten, or a Variable version that adjusts anywhere from 2800 Kelvin to 6000 Kelvin. Additionally, it has the capability of adding green or magenta to match any other white light fixture.

There are various ways to control the Quad; AAdynTech's User Interface Module, Wired DMX or Wireless DMX, making it very flexible for any kind of production.

Included with the fixture: Control Box, 20 Pin Control Cable, User Interface Module, Wireless Receiver, Standard Diffuser Lens, Twist Lock AC Cord, Yoke and Pin.

Accessories include: Travel Case, Lite Diffuser, Heavy Diffuser, Snap Grid, Chimera Pop Bank, Honeycomb Grid.

Like all AAdynTech products, the Quad is designed and manufactured in the United States by Sturdy Corporation, guaranteeing quality and dependable service.

**92+
CRI**

**IP65
Rated**



FEATURES AT A GLANCE:

- Minus/Plus Green/Magenta Correction
- 92+ CRI across entire brightness range
- Rated IP65
- 886 foot candle output @ 10 feet
- Color Range 2800k - 6000k
- Auto range voltage - 100/277 VAC-50/60Hz
- Power Consumption 2-20 amps @ 120Vac
- Flicker-free up to 265,000 fps
- Compatible with existing User Interface Modules (UIM)
- Wireless or wired DMX with RDM
- Daisy chain DMX
- Certified ETL, CSA, CE and RoHS compliant
- Operating temperature -20°C to +50°C
- Programmable multiple lightning and strobe effects
- 2 year warranty
- MSRP \$14,000



Punch Quad Variable

NO DIFFUSER

	@10 FEET	@15 FEET	@20 FEET
Lux	9,536	4,434	2,626
Foot Candles	886	412	244

30° DIFFUSER

	@10 FEET	@15 FEET	@20 FEET
Lux	8,674	3,982	2,368
Foot Candles	806	370	220

55° DIFFUSER

	@10 FEET	@15 FEET	@20 FEET
Lux	7,146	3,336	2,002
Foot Candles	664	310	186

80° DIFFUSER

	@10 FEET	@15 FEET	@20 FEET
Lux	6,564	3,056	1,850
Foot Candles	610	284	172

SPECIFICATIONS

Control	Local, UIM, DMX
Source	LED, 5600K CCT, 92+ CRI
Cooling	Passive
Mounting	Junior
Certifications	ETL, CSA, CE and RoHS Compliant

FIXTURE DIMENSIONS

Length	927.1 mm	36.5 in
Width	150.8 mm	6.5 in
Height	609.6 mm	24 in
Weight	49.89 kg	110 lbs

CONTROL BOX DIMENSIONS





Length	390.0 mm	15.39 in
Width	188.4 mm	7.42 in
Height	419.1 mm	16.5 in
Weight	22.68 kg	50 lbs

POWER

Input Voltage	100-277v AC
Input Freq	50/60 Hz
Input Current	2600 Watts @ full

HIGHLIGHTS

- RoHS Compliant
- 886 foot candles @ 10 feet
- IP65 Rated
- Dimmable with no color shift
- No harmful UV or IR radiation

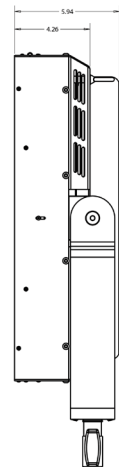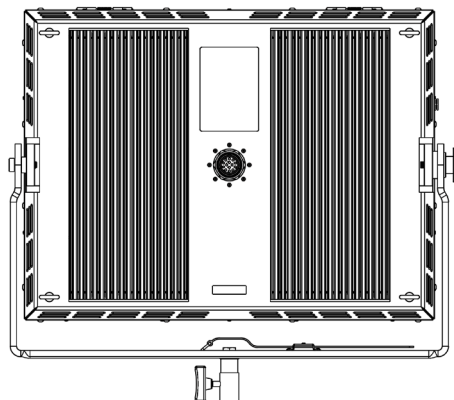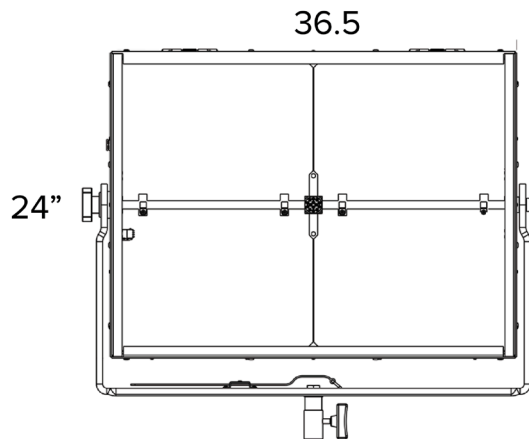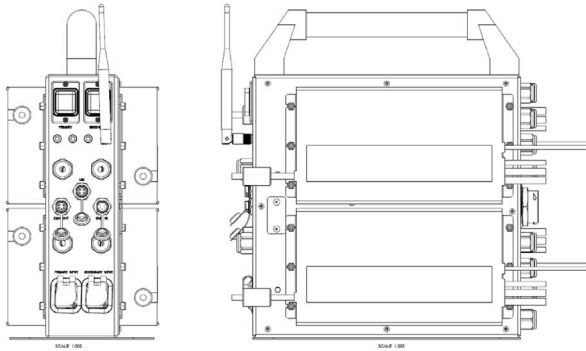

©2023 Sturdy Corporation. All rights reserved. As technical advancements continue, all specifications are subject to change without notice.